Physics and Detectors Studies of the New Baseline Machine Parameters

Jim Brau

November 12, 2010

ILC Scope

ILCSC "scope document" specifies the requirements, including emphasis on importance of variable energy operation, with good luminosity performance

- Top could be special messenger; 350 GeV scan!
- Polarization very powerful probe!

RDR vs ILC Physics Goals

- E_{cm} adjustable from 200 – 500 GeV
- Luminosity → $\int L dt$ = 500 fb^{-1} in 4 years
- Ability to scan between 200 and 500 GeV
- Energy stability and precision below 0.1%
- Electron polarization of at least 80%

- The machine must be upgradeable to 1 TeV

The RDR Design meets these "requirements," including the recent update and clarifications of the reconvened ILCSC Parameters group!

7-Feb-07
GDE/ACFA Closing Beijing
Global Design Effort 6

Higgs threshold spin analysis

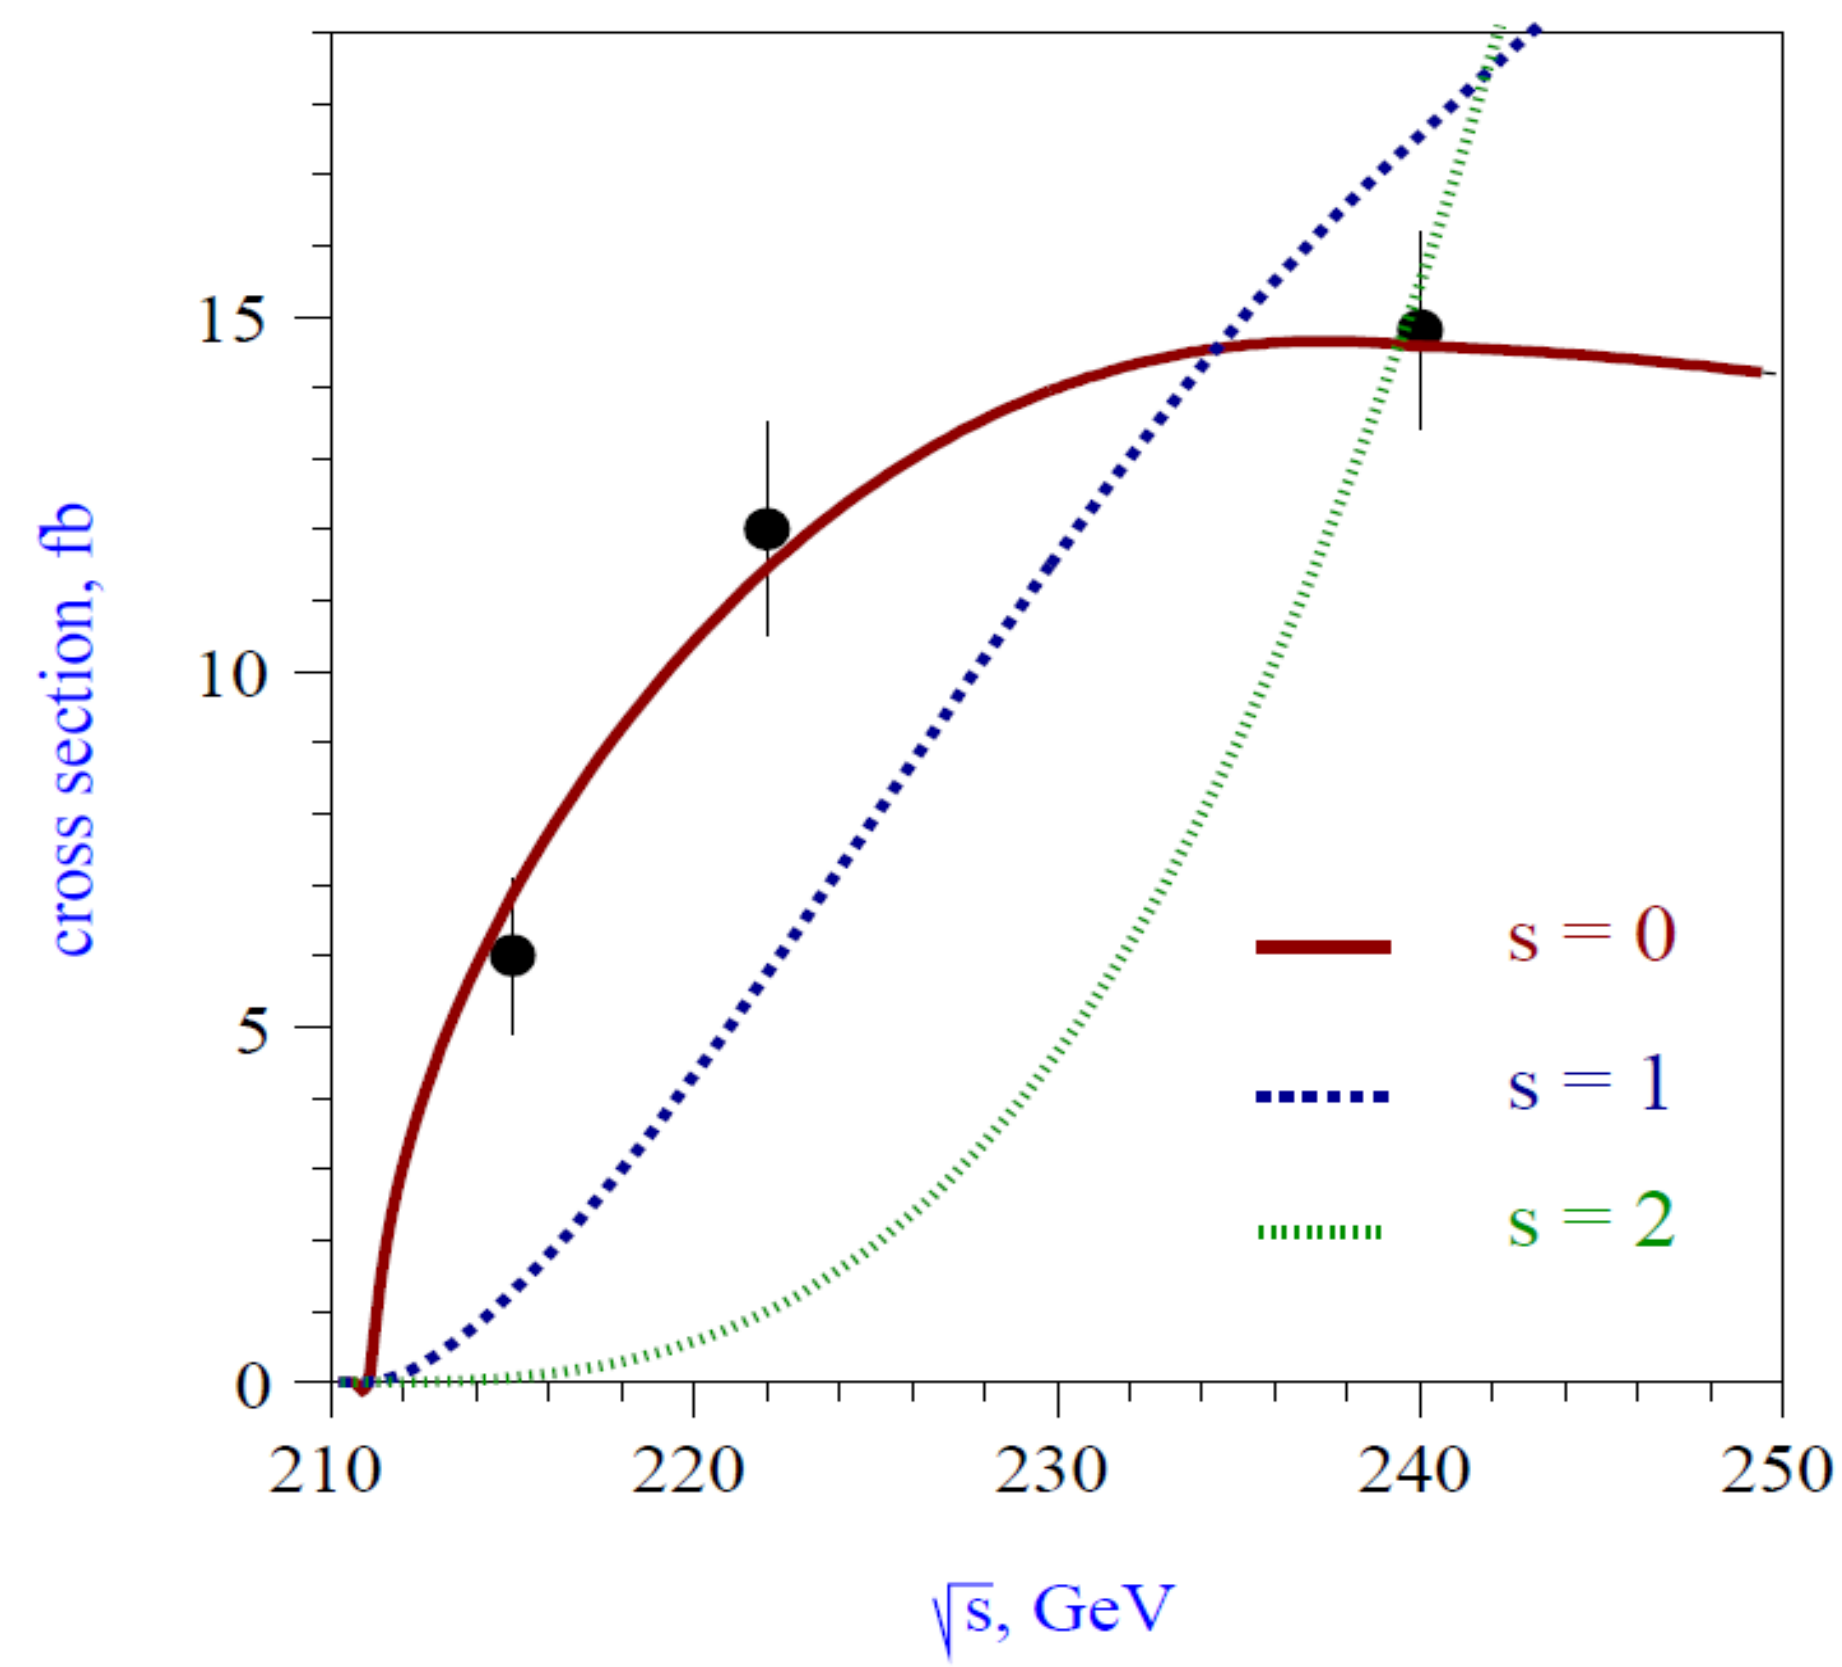

FIGURE 2. The cross sections determined at $\sqrt{s}$ = 215, 222 and 240 GeV (dots) and the predictions for s=0 (full line), s=1 (dashed line) and s=2 (dotted line).

20 fb^{-1} at each energy point

This is an example of the need for good low energy luminosity

hep-ph/0302113 Dova, Garcia-Abia and Lohmann

ILC Design Evolution

- Reference Design Report (RDR) – 2007
  - First detailed technical snapshot, defining in detail the technical parameters and components to guide the development of the worldwide R&D program

- SB2009
  - Proposed set of changes to the baseline aimed at optimizing ILC design for cost, performance and risk.
  - Physics impact studied and commented on by Physics and Detectors Study Group*

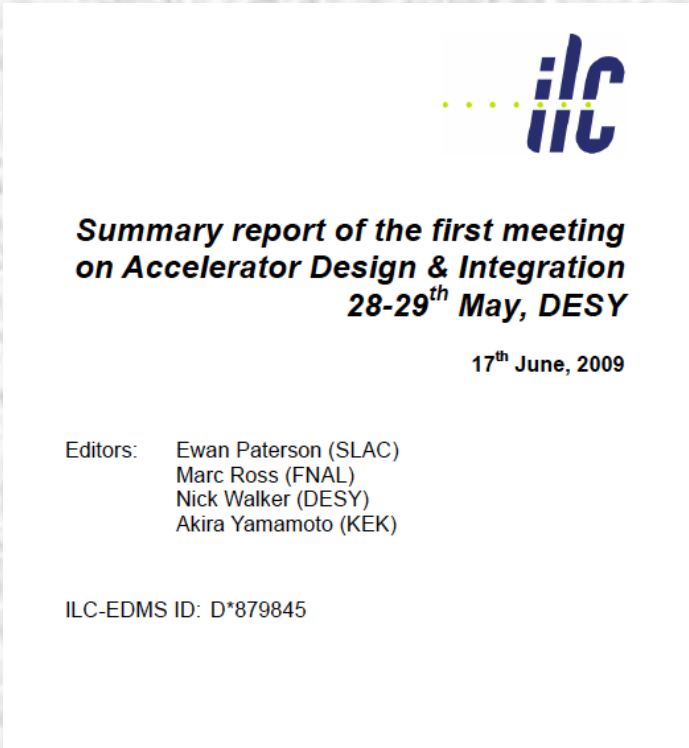

ilc

Summary report of the first meeting on Accelerator Design & Integration 28-29th May, DESY

17th June, 2009

Editors: Ewan Paterson (SLAC)
Marc Ross (FNAL)
Nick Walker (DESY)
Akira Yamamoto (KEK)

ILC-EDMS ID: D*879845

- New ILC Design and Parameters
  - Response to study group's reaction to reduced low energy luminosity – a modified design with new parameters

* T. Barklow, M. Berggren, J. Brau, K. Buesser, K. Fujii, N. Graf, J. Hewett, T. Markiewicz, T. Maruyama, D. Miller, A. Miyamoto, Y. Okada, M. Thomson, G. Weiglein

Recently Updated ILC Machine Parameters

IP and General Parameters								
								upgrade
	Centre-of-mass energy	E_{cm}	GeV	**200**	**250**	**350**	**500**	**1000**
	Beam energy	E_{beam}	GeV	100	125	175	250	500
	Lorentz factor	γ		1,96E+05	2,45E+05	3,42E+05	4,89E+05	9,78E+05
	Collision rate	f_{rep}	Hz	5	5	5	5	4
	Electron linac rate	f_{linac}	Hz	10	10	5	5	4
	Number of bunches	n_b		1312	1312	1312	1312	2625
	Electron bunch population	N_-	$\times 10^{10}$	2	2	2	2	2
	Positron bunch population	N_+	$\times 10^{10}$	2	2	2	2	2
	Bunch seperation	Δt_b	ns	740	740	740	740	356
	Bunch seperation $\times f_{RF}$	$\Delta t_b f_{RF}$		962	962	962	962	463
	Pulse current	I_{beam}	mA	4,33	4,33	4,33	4,33	9,00
	RMS bunch length	σ_z	mm	0,3	0,3	0,3	0,3	0,3
	Electron RMS energy spread	$\Delta p/p$	%	0,22	0,22	0,22	0,21	0,11
	Positron RMS energy spread	$\Delta p/p$	%	0,17	0,14	0,10	0,07	0,04
	Electron polarisation	P_-	%	80	80	80	80	80
	Positron polarisation	P_+	%	31	31	29	22	22
	Horizontal emittance (linac exit)	$\gamma\epsilon_x$	µm	10	10	10	10	10
	Vertical emittance (linac exit)	$\gamma\epsilon_y$	nm	35	35	35	35	35
	IP horizontal beta function	β_x^*	mm	16	12	15	11	30
	IP vertical beta function (no TF)	β_y^*	mm	0,48	0,48	0,48	0,48	0,30
	IP vertical beta function (TF)	β_y^*	mm	0,2	0,2	0,2	0,2	0,2
	IP RMS horizontal beam size	σ_x^*	nm	904	700	662	474	554
	IP RMS veritcal beam size (no TF)	σ_y^*	nm	9,3	8,3	7,0	5,9	3,3
	IP RMS veritcal beam size (TF)	σ_y^*	nm	6,0	5,3	4,5	3,8	2,7
No TF	Horizontal distruption parameter	D_x		0,2	0,3	0,2	0,3	0,1

Recently Updated ILC Machine Parameters (cont.)

IP and General Parameters									
									upgrade
	Centre-of-mass energy	E_{cm}	**GeV**	**200**	**250**	**350**	**500**		**1000**
	Vertical disruption parameter	D_y		20,7	23,8	21,3	24,9		19,2
	Horizontal enhancement factor	H_{Dx}		1,1	1,1	1,1	1,2		1,0
	Vertical enhancement factor	H_{Dy}		5,7	6,0	5,8	6,1		3,6
	Total enhancement factor	H_D		1,8	1,9	1,8	2,0		1,5
	Geometric luminosity	L_{geom}	$\times 10^{34}$ cm^{-2}s^{-1}	0,2	0,4	0,5	0,8		1,8
	Luminosity	L	$\times 10^{34}$ cm^{-2}s^{-2}	**0,5**	**0,7**	**0,8**	**1,5**		**2,8**
	Fraction of luminosity in top 1%	$L_{0.01}/L$			0,96	0,88	0,73		
	Average beamstrahlung parameter	Y_{av}		0,013	0,021	0,032	0,063		0,109
	Maximum beamstrahlung parameter	Y_{max}		0,032	0,051	0,075	0,150		0,260
	Average number of photons / particl	n_{γ}		0,96	1,22	1,28	1,74		1,46
	Average energy loss	δE_{BS}	%	0,53	1,04	1,55	3,76		4,83
	Number of pairs per bunch crossing	N_{pair}	$\times 10^3$		97,4	214	494		
With TF	**Luminosity**	L	$\times 10^{34}$ cm^{-2}s^{-2}	**0,5**	**0,8**	**1,0**	**2,0**		
	Average energy loss	δE_{BS}	%		0,6	1,6	3,6		
	Number of pairs per bunch crossing	N_{pair}	$\times 10^3$		115	255	596		
	Fraction of luminosity in top 1%	$L_{0.01}/L$			0,89	0,77	0,72		

Recently Updated ILC Machine Parameters

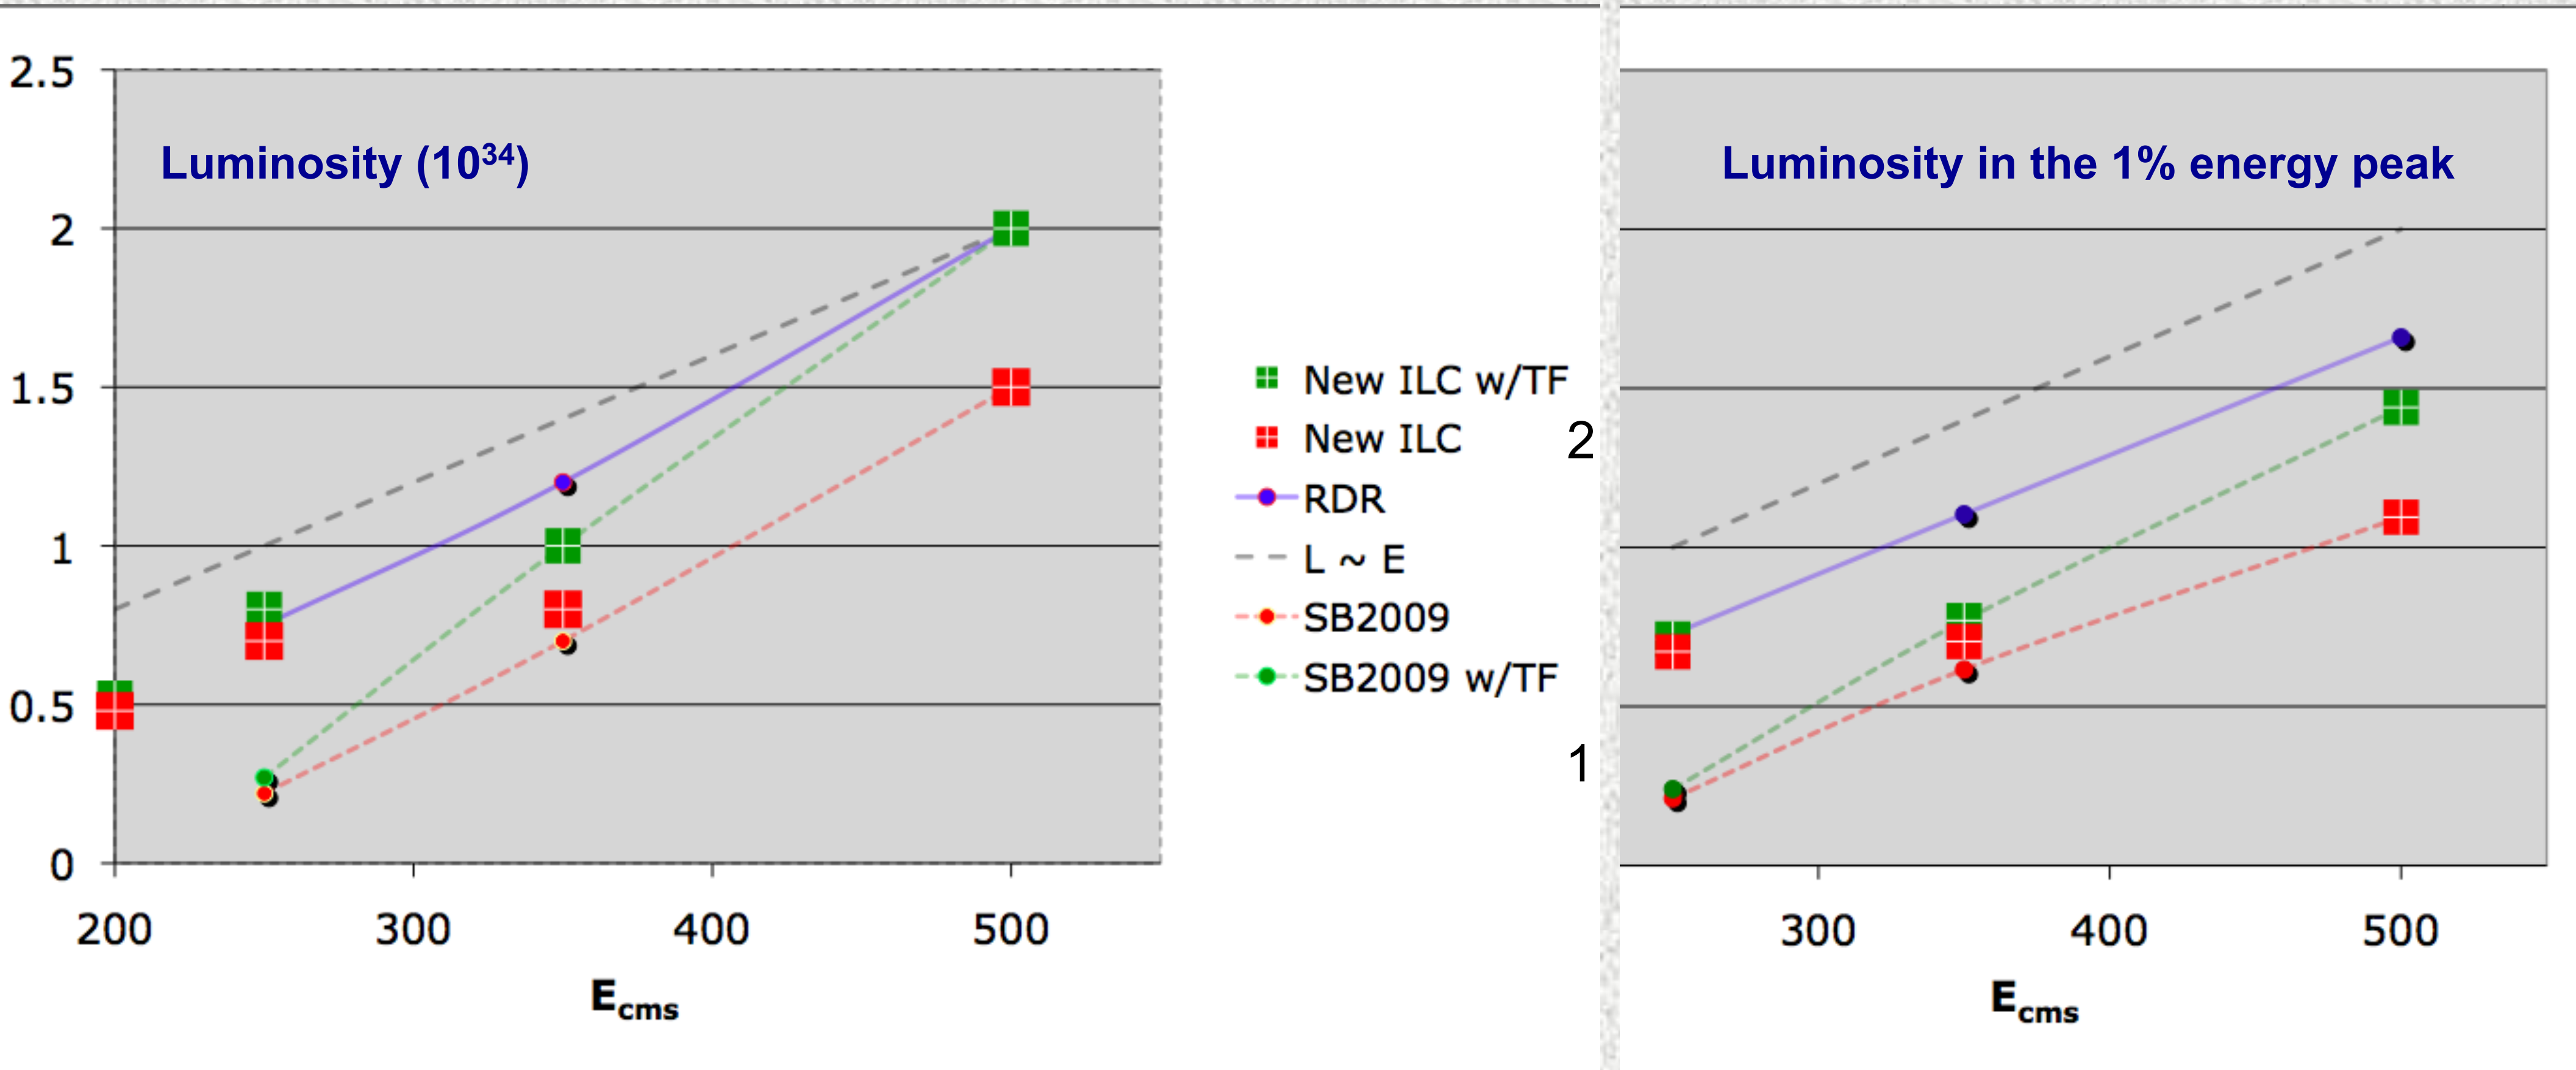

TF = traveling focus

Physics and Detector Studies of New ILC Parameters

- **Effects which have been studied**
  - Luminosity at low E_{cms}
  - Effective luminosity due to Beamstrahlung losses
  - Machine backgrounds – Takashi Maruyama
- **Physics processes studied to assess impact**

  $e^+e^- \rightarrow Z\,h \rightarrow \mu^+\,\mu^-$ Higgs
  - Higgs mass – Hengne Li
  - Higgs cross section – Hengne Li
  - Higgs branching ratios - Hiroaki Ono at ECFA IWLC

  Stau detection (forward electron vetoes) – Mikael Berggren et al.

  Low mass SUSY scenarios study – Paul Grannis
  - Snowmass SM2 benchmark
    - (m_0 = 100 GeV, $m_{1/2}$ = 250 GeV, tan β = 10, A_0 = 0, and sign μ = +) - similar to SPS1a point

Higgs Mass and Cross Section

- Higgs measurements are best done at E_{cm}=250 GeV
- New Study of Higgs Recoil Mass compares new machine parameters with RDR, and operation @ 350 GeV - Hegne Li

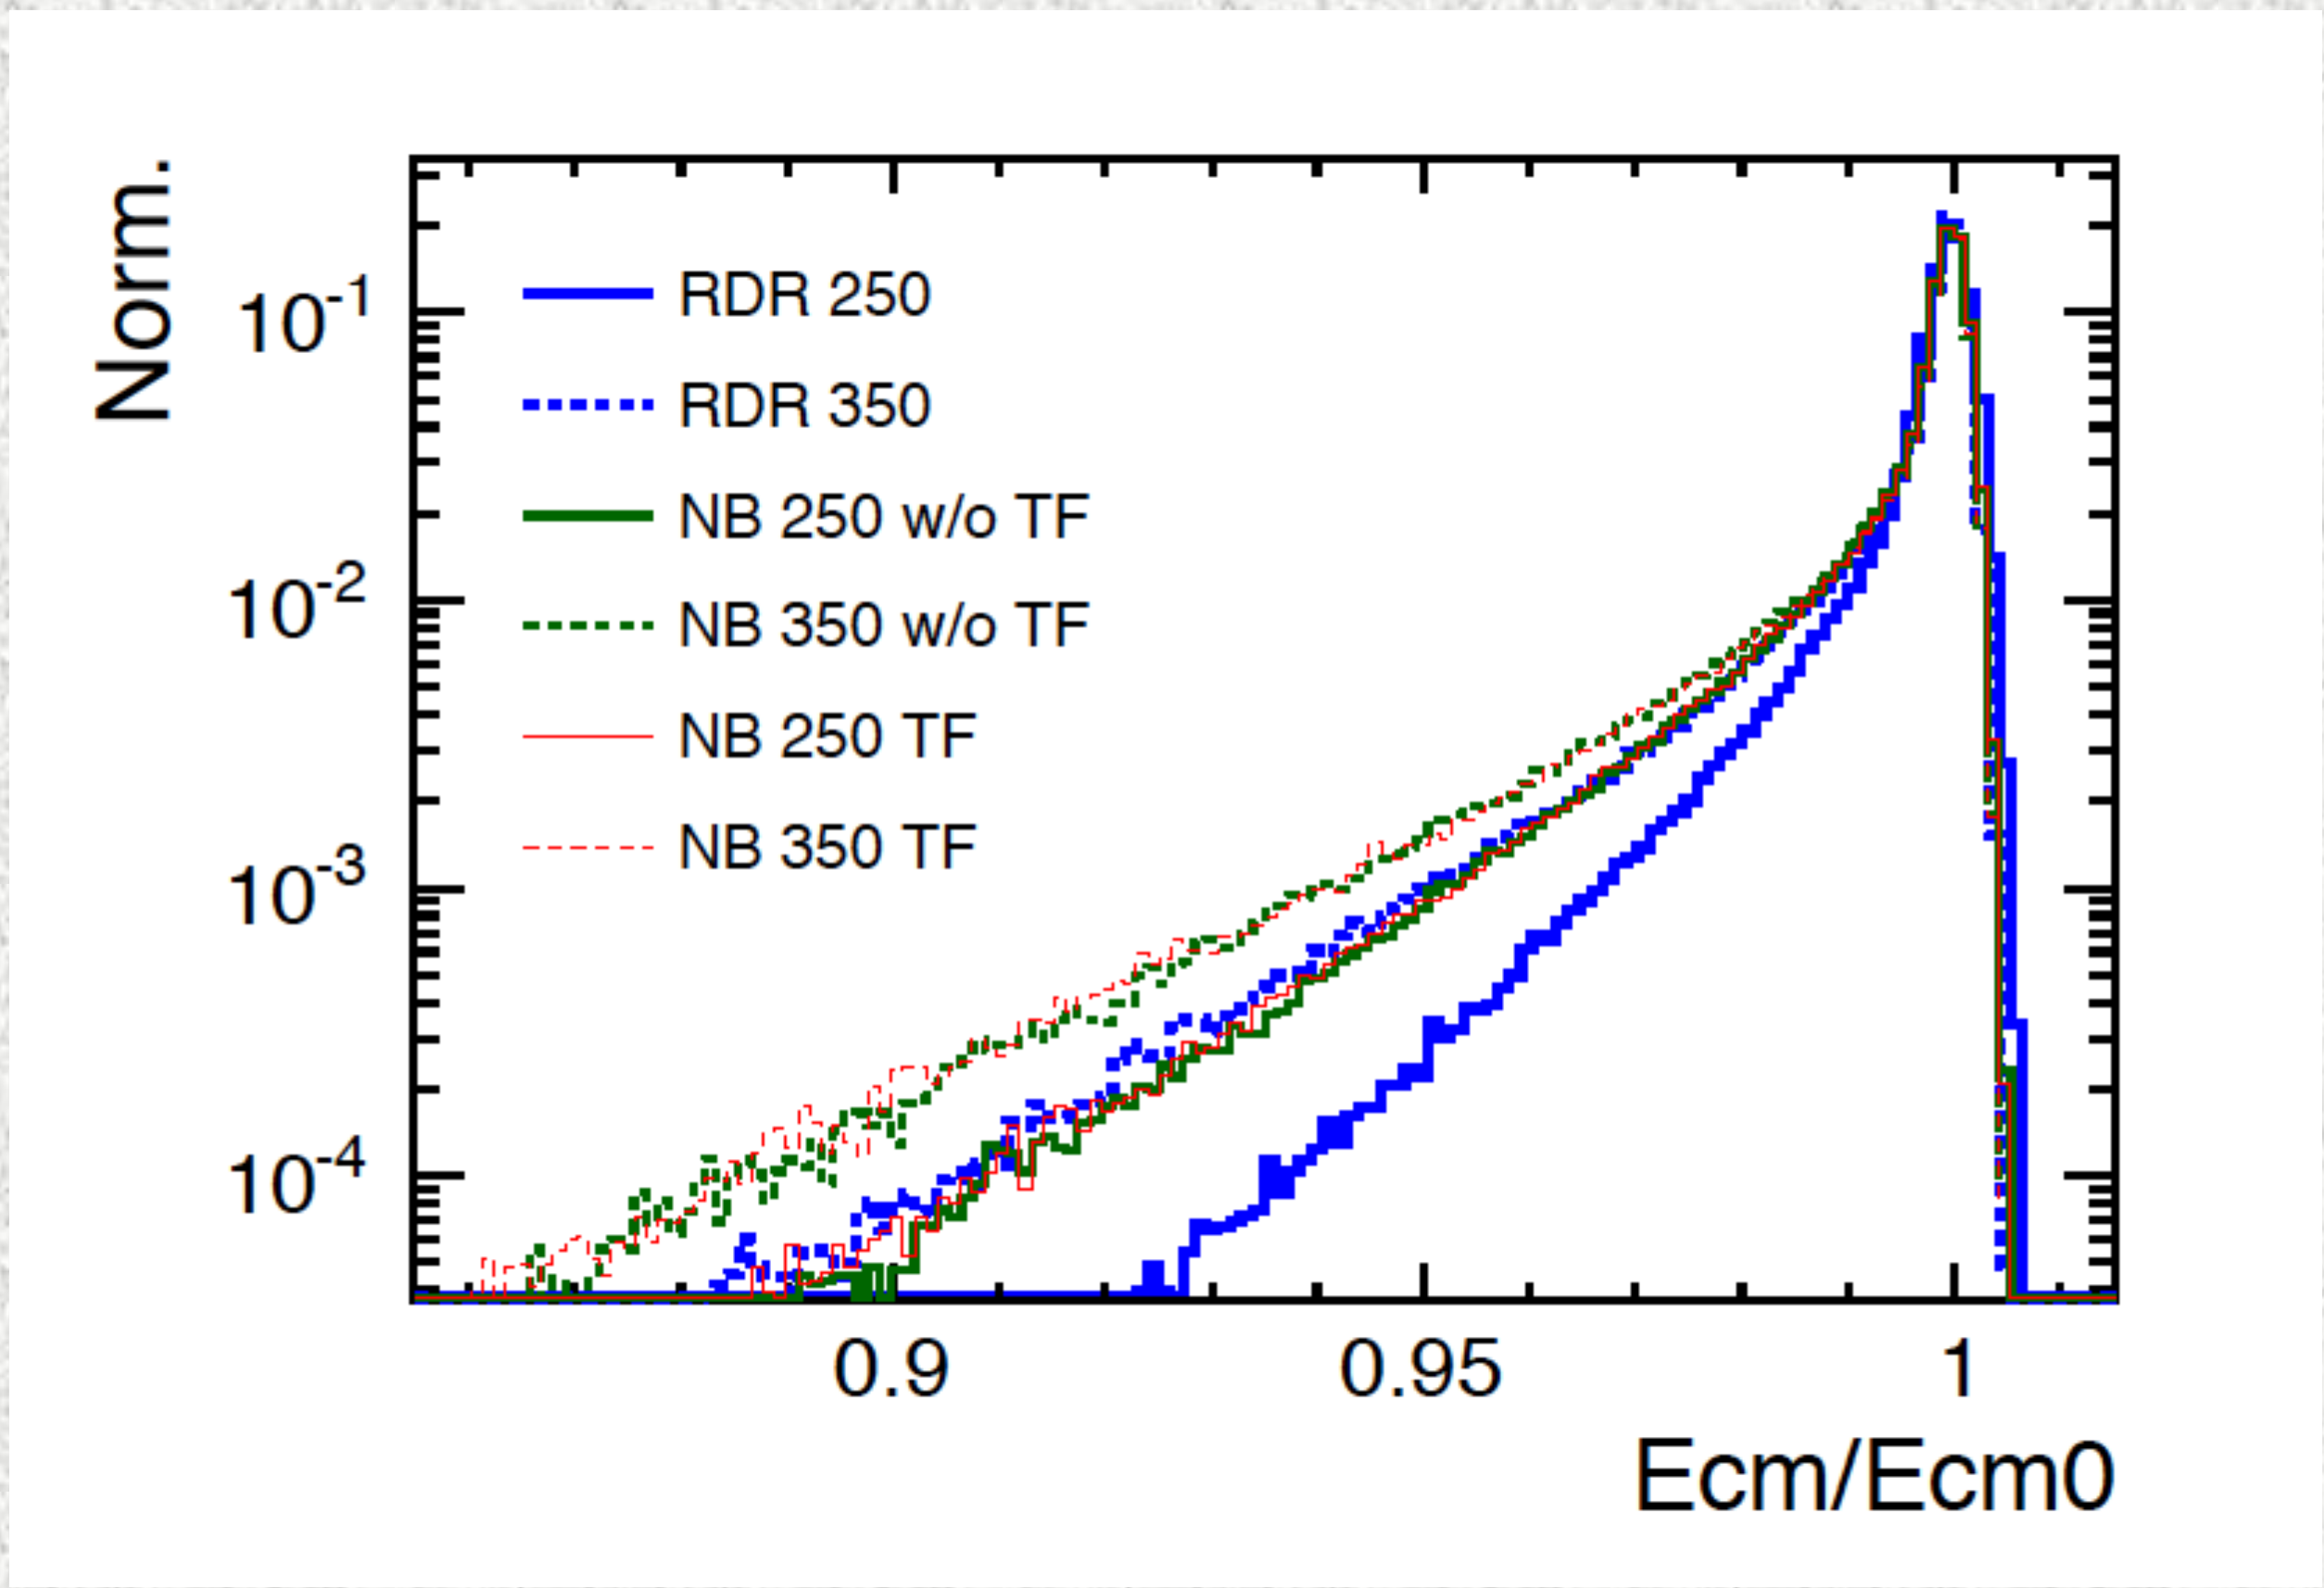

Hengne Li

Higgs Mass and Cross Section

Beam Par	$\mathcal{L}_{int}$ (fb^{-1})	ϵ	S/B	M_H (GeV)	σ (fb) ($\delta\sigma/\sigma$)
RDR 250	188	55%	62%	120.001 ± 0.043	11.63 ± 0.45 (3.9%)
RDR 350	300	51%	92%	120.010 ± 0.087	7.13 ± 0.28 (4.0%)
NB w/o TF 250	175	61%	62%	120.002 ± 0.032	11.67 ± 0.42 (3.6%)
NB w/o TF 350	200	52%	84%	120.003 ± 0.106	7.09 ± 0.35 (4.9%)
NB w/ TF 250	200	63%	59%	120.002 ± 0.029	11.68 ± 0.40 (3.4%)
NB w/ TF 350	250	51%	89%	120.005 ± 0.093	7.09 ± 0.31 (4.4%)

Coupling precision (cross section) better with new parameters than RDR

Higgs precision improvements:

δM: 43 MeV → 29 MeV (wTF)

$\delta\sigma$: 3.9% → 3.4% (wTF)

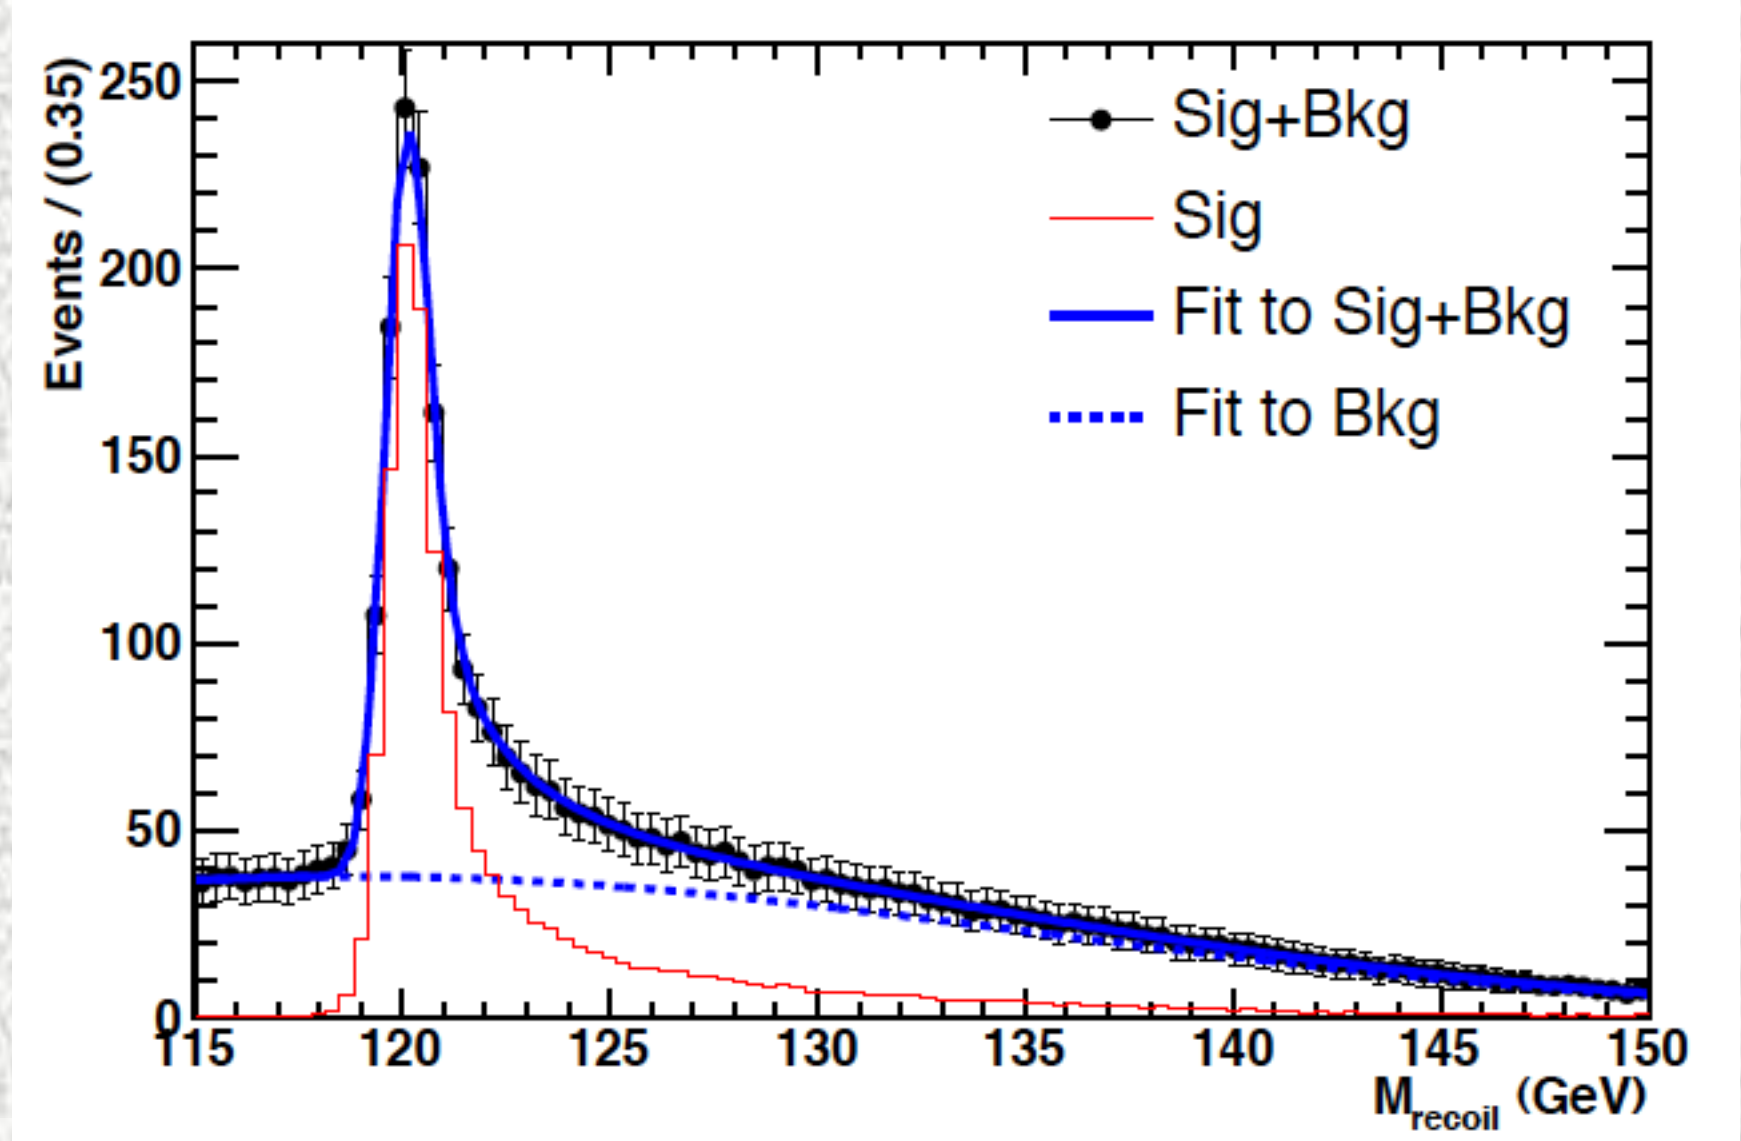

Higgs Branching Ratios

- Study in progress
- Preliminary results presented in Geneva

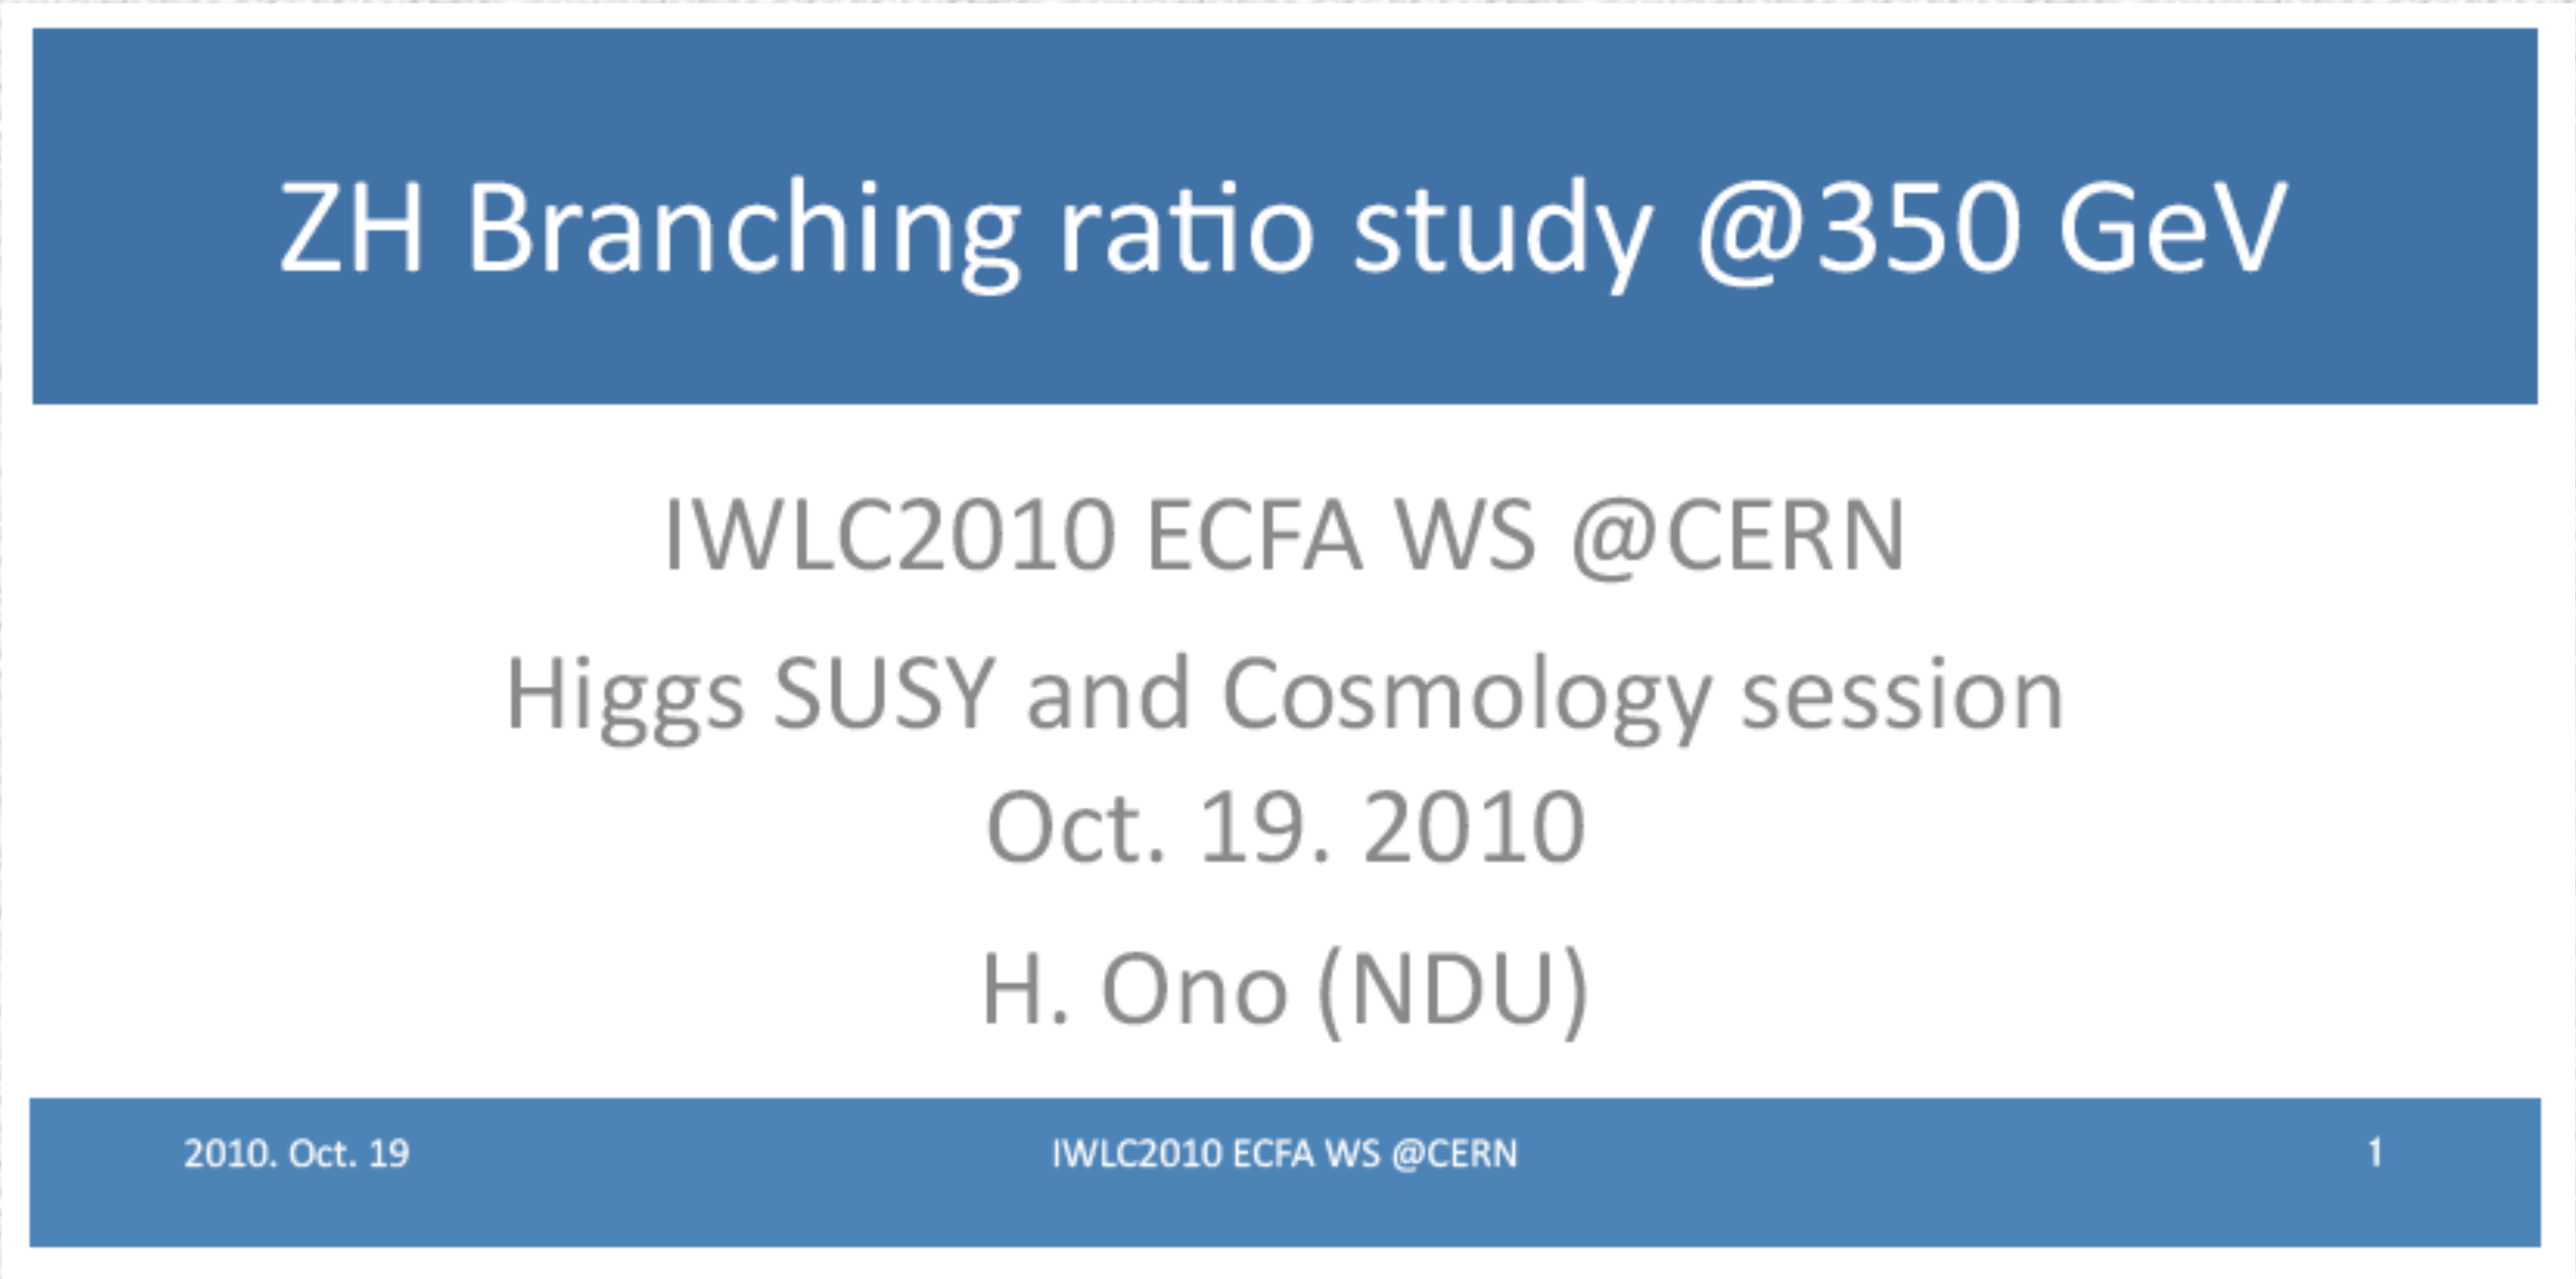

Higgs Branching Ratios

Relative branching fraction has checked for Ecm=250, 350 GeV with 1,000 times toy MC

$$\frac{Br(H \to c\bar{c})}{Br(H \to b\bar{b})} = \frac{r_{cc}/\varepsilon_{cc}}{r_{bb}/\varepsilon_{bb}}$$

Efficiency	Ecm=250 GeV		Ecm=350 GeV
	neutrino	hadron	hadron
ε_{bb}	36.8%	39.0%	31.7%
ε_{cc}	41.8%	41.9%	35.5%

Fitted results	Ecm=250 GeV			Ecm=350 GeV
mode	neutrino	hadron	w/o qq	hadron
r_{bb}	0.853+-0.009	0.774+-0.013	0.775+-0.014	0.788+-0.008
r_{cc}	0.052+-0.004	0.046+-0.005	0.046+-0.004	0.048+-0.002
BR(cc)/BR(bb)	0.054+-0.004	0.055+-0.006	0.055+-0.005	0.054+-0.003
ΔBR(cc)/BR(bb)	7.94%	10.15%	9.68%	6.18%

H. Ono

(statistic error only)

Preliminary result

Measurement accuracy looks improved in hadron mode, caused by better S/√N?

Low mass SUSY scenarios study

- Study of Snowmass SM2 point (~ SPS1a point)
    - hep-ex/0211002v1, P. Grannis

$(m_0 = 100 \text{ GeV}, m_{1/2} = 250 \text{ GeV}, \tan\beta = 10, A_0 = 0, \text{and sign}\mu = +)$.

	M	Final state	(BR(%))			
$\tilde{e}_R$	143	$\tilde{\chi}_1{}^0 e$ (100)				
$\tilde{e}_L$	202	$\tilde{\chi}_1{}^0 e$ (45)	$\tilde{\chi}_1{}^{\pm} \nu_e$ (34)	$\tilde{\chi}_2{}^0 e$ (20)		
$\tilde{\mu}_R$	143	$\tilde{\chi}_1{}^0 \mu$ (100)				
$\tilde{\mu}_L$	202	$\tilde{\chi}_1{}^0 \mu$ (45)	$\tilde{\chi}_1{}^{\pm} \nu_\mu$ (34)	$\tilde{\chi}_2{}^0 \mu$ (20)		
$\tilde{\tau}_1$	135	$\tilde{\chi}_1{}^0 \tau$ (100)				
$\tilde{\tau}_2$	206	$\tilde{\chi}_1{}^0 \tau$ (49)	$\tilde{\chi}_1{}^{-} \nu_\tau$ (32)	$\tilde{\chi}_2{}^0 \tau$ (19)		
$\tilde{\nu}_e$	186	$\tilde{\chi}_1{}^0 \nu_e$ (85)	$\tilde{\chi}_1{}^{\pm} e^{\mp}$ (11)	$\tilde{\chi}_2{}^0 \nu_e$ (4)		
$\tilde{\nu}_\mu$	186	$\tilde{\chi}_1{}^0 \nu_\mu$ (85)	$\tilde{\chi}_1{}^{\pm} \mu^{\mp}$ (11)	$\tilde{\chi}_2{}^0 \nu_\mu$ (4)		
$\tilde{\nu}_\tau$	185	$\tilde{\chi}_1{}^0 \nu_\tau$ (86)	$\tilde{\chi}_1{}^{\pm} \tau^{\mp}$ (10)	$\tilde{\chi}_2{}^0 \nu_\tau$ (4)		
$\tilde{\chi}_1{}^0$	96	stable				
$\tilde{\chi}_2{}^0$	175	$\tilde{\tau}_1 \tau$ (83)	$\tilde{e}_R e$ (8)	$\tilde{\mu}_R \mu$ (8)		
$\tilde{\chi}_3{}^0$	343	$\tilde{\chi}_1{}^{\pm} W^{\mp}$ (59)	$\tilde{\chi}_2{}^0 Z$ (21)	$\tilde{\chi}_1{}^0 Z$ (12)	$\tilde{\chi}_1{}^0 h$ (2)	
$\tilde{\chi}_4{}^0$	364	$\tilde{\chi}_1{}^{\pm} W^{\mp}$ (52)	$\tilde{\nu} \nu$ (17)	$\tilde{\tau}_2 \tau$ (3)	$\tilde{\chi}_{1,2} Z$ (4)	$\tilde{\ell}_R \ell$ (6)
$\tilde{\chi}_1{}^{\pm}$	175	$\tilde{\tau}_1 \tau$ (97)	$\tilde{\chi}_1{}^0 q\bar{q}$ (2)	$\tilde{\chi}_1{}^0 \ell \nu$ (1.2)		
$\tilde{\chi}_2{}^{\pm}$	364	$\tilde{\chi}_2{}^0 W$ (29)	$\tilde{\chi}_1{}^{\pm} Z$ (24)	$\tilde{\ell} \nu_\ell$ (18)	$\tilde{\chi}_1{}^{\pm} h$ (15)	$\tilde{\nu}_\ell \ell$ (8)

Low mass SUSY scenarios run allocations

Beams	Energy	Pol.	$\int \mathcal{L}dt$	$[\int \mathcal{L}dt]_{equiv}$	Comments
e^+e^-	500	L/R	335	335	Sit at top energy for sparticle masses
e^+e^-	M_Z	L/R	10	45	Calibrate with Z's
e^+e^-	270	L/R	100	185	Scan $\widetilde{\chi}_1{}^0\ \widetilde{\chi}_2{}^0$ threshold (L pol.) Scan $\widetilde{\tau}_1\ \widetilde{\tau}_1$ threshold (R pol.)
e^+e^-	285	R	50	85	Scan $\widetilde{\mu}_R{}^+\ \widetilde{\mu}_R{}^-$ threshold
e^+e^-	350	L/R	40	60	Scan $t\bar{t}$ threshold Scan $\tilde{e}_R\ \tilde{e}_L$ threshold (L & R pol.) Scan $\widetilde{\chi}_1{}^+\ \widetilde{\chi}_1{}^-$ threshold (L pol.)
e^+e^-	410	L	60	75	Scan $\widetilde{\tau}_2\ \widetilde{\tau}_2$ threshold Scan $\widetilde{\mu}_L{}^+\ \widetilde{\mu}_L{}^-$ threshold
e^+e^-	580	L/R	90	120	Sit above $\widetilde{\chi}_1{}^\pm\ \widetilde{\chi}_2{}^\mp$ threshold for $\widetilde{\chi}_2{}^\pm$ mass
e^-e^-	285	RR	10	95	Scan with e^-e^- collisions for $\tilde{e}_R$ mass

hep-ex/0211002v1, P. Grannis

Year	1	2	3	4	5	6	7
$\int \mathcal{L}dt$	10	40	100	150	200	250	250

~1000 fb^{-1} equivalent luminosity (scaled by L ~ E) required to achieve physics program

Low mass SUSY scenarios run allocations

	δM (Ecm scaling)			δM (SBmodified)			δM (RDR)		
sparticle	endpt	scan	total	endpt	scan	total	endpt	scan	total
selectron_R	0.19	0.02	0.02	0.19	0.02	0.02	0.19	0.02	0.02
selectron_L	0.27	0.30	0.20	0.27	0.35	0.21	0.27	0.32	0.21
smuon_R	0.08	0.13	0.07	0.08	0.15	0.07	0.08	0.15	0.07
smuon_L	0.70	0.76	0.51	0.70	0.82	0.53	0.70	0.79	0.52
stau_1	~1-2	0.64	0.64	~1-2	0.73	0.73	~1-2	0.82	0.82
stau_2		1.10	1.10		1.25	1.25		1.25	1.25
sneutrino_e	~1	--	~1	~1	--	~1	~1	--	~1
sneutrino_mu	~7	--	~7	~7	--	~7	~7	--	~7
sneutrino_tau	--	--	--	--	--	--	--	--	--
chi1^0	0.07	--	0.07	0.07	--	0.07	0.07	--	0.07
chi2^0	~1-2	0.12	0.12	~1-2	0.14	0.14	~1-2	0.14	0.14
chi3^0	8.50	--	8.50	8.50	--	8.50	8.50	--	8.50
chi4^0	--	--	--	--	--	--	--	--	--
chi1^+	~1-2	0.18	0.18	~1-2	0.21	0.21	~1-2	0.19	0.19
chi2^+	4.00	--	4.00	4.00	--	4.00	4.00	--	4.00

sparticle mass precision expected in the RDR and SBmodified parameter sets differ little from those with the Ecm luminosity scaling.

P. Grannis, Oct. 28, 2010

Physics Without Traveling Focus

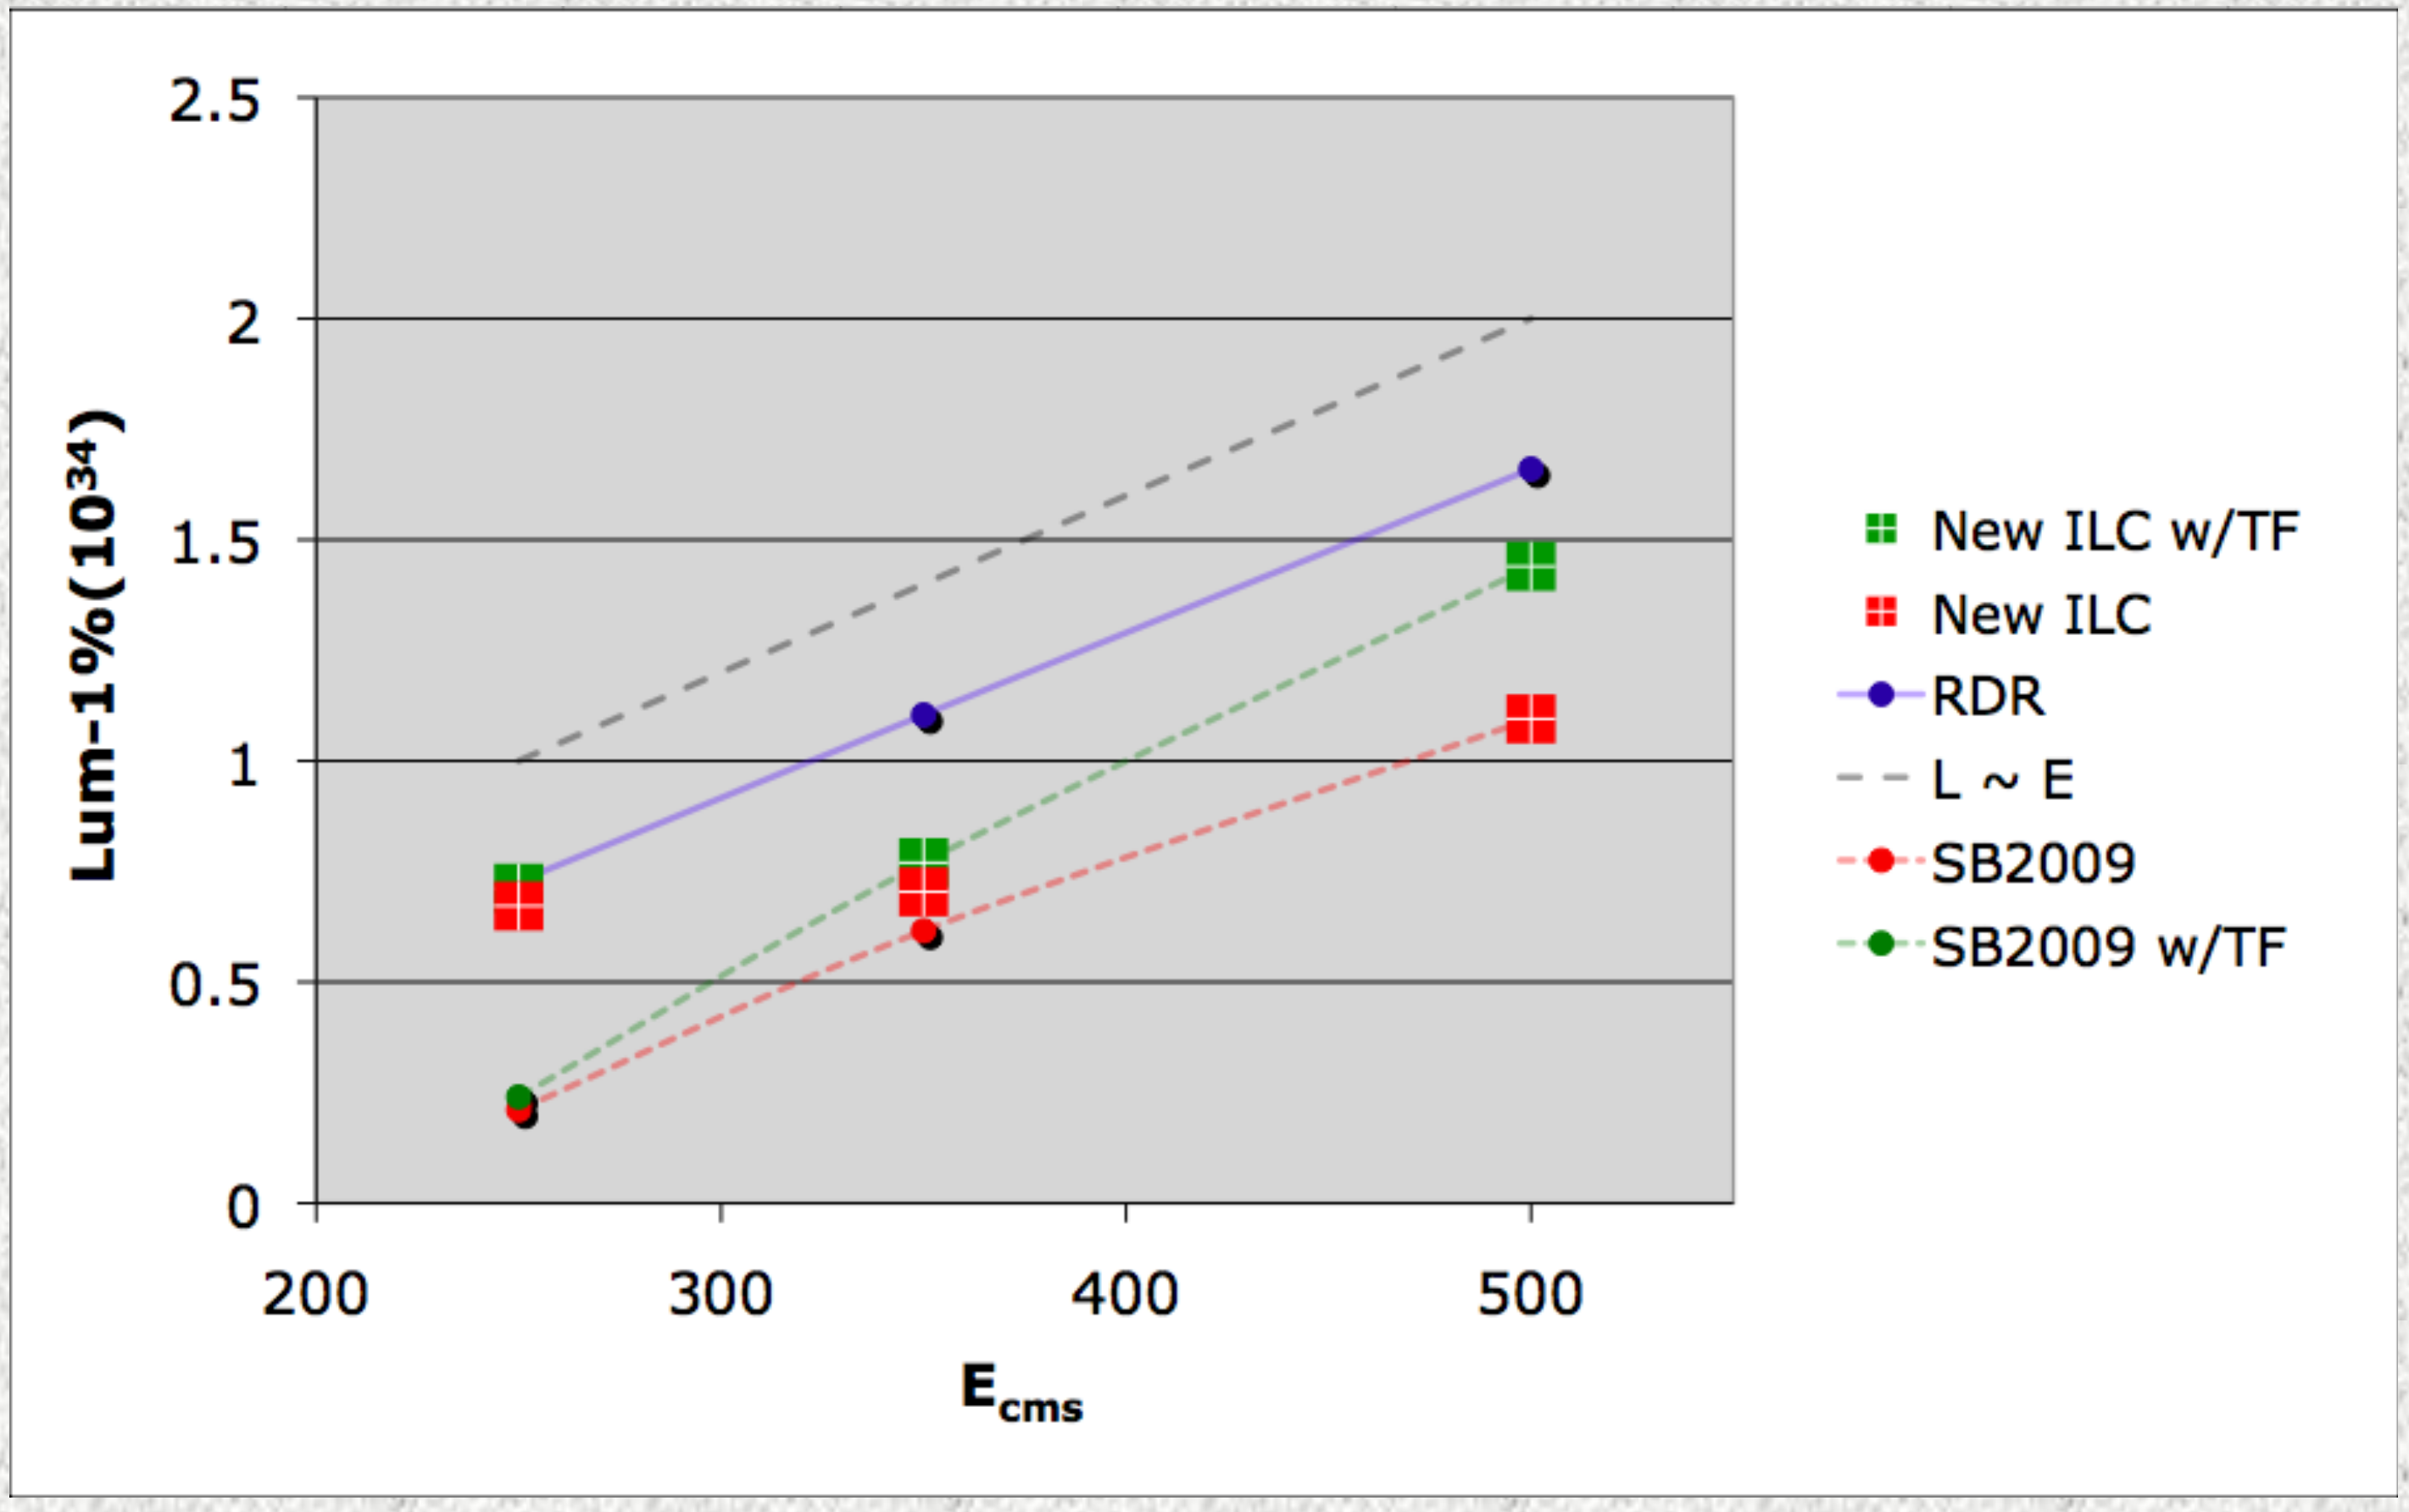

- Loss of luminosity at highest energies
  - Impact needs to be quantified

Positron Polarization

	250 GeV	350 GeV	500 GeV
Positron Polarization	31%	29%	22%

- Physics case for polarized e^- and e^+
  - Comprehensive overview, hep-ph/0507011, Phys.Rept., 460 (2008)
  - See also executive summary on:

  www.ippp.dur.ac.uk/LCsources/
- Polarized beams required to
  - Analyze the structure of all kinds of interactions
  - Improve statistics: enhance rates, suppress background processes
  - Get systematic uncertainties under control
- Discoveries via deviations from SM predictions in precision measurements!
  - Important in particular at $\sqrt{s} \leq 500$ GeV !

G. Moortgat-Pick
IWLC10, Geneva

Positron Polarization

Summary table and gain factor

- Comparison with (80%,0): estimated gain factor when — hep-ph/0507011

G. Moortgat-Pick
IWLC10, Geneva

Case	Effects for $P(e^-) \longrightarrow P(e^-)$ and $P(e^+)$	Gain& Requirement	most (80%, 60%) → (80%, 30%)
Standard Model:			
top threshold	Electroweak coupling measurement	factor 3	gain factor 2
$t\bar{q}$	Limits for FCN top couplings improved	factor 1.8	gain factor 1.4
CPV in $t\bar{t}$	Azimuthal CP-odd asymmetries give	$P^T_{e^-} P^T_{e^+}$ required	$P^T_{e-}\ P^T_{e+}$ required
	access to S- and T-currents up to 10 TeV		factor 1.3 worse
W^+W^-	Enhancement of $\frac{S}{B}, \frac{S}{\sqrt{B}}$	up to a factor 2	
	TGC: error reduction of $\Delta\kappa_\gamma, \Delta\lambda_\gamma, \Delta\kappa_Z, \Delta\lambda_Z$	factor 1.8	
	Specific TGC $\tilde{h}_+ = \mathrm{Im}(g_1^R + \kappa^R)/\sqrt{2}$	$P^T_{e^-} P^T_{e^+}$ required	$P^T_{e-}\ P^T_{e+}$ required
CPV in γZ	Anomalous TGC $\gamma\gamma Z, \gamma ZZ$	$P^T_{e^-} P^T_{e^+}$ required	
HZ	Separation: $HZ \leftrightarrow H\bar{\nu}\nu$	factor 4	gain factor 2
	Suppression of $B = W^+\ell^-\nu$	factor 1.7	
$t\bar{t}H$	Top Yukawa coupling measurement at $\sqrt{s} = 500$ GeV	factor 2.5	gain factor 1.6

Summary

- The New Baseline Machine Parameters are being studied by the physics and detectors SB2009 Working Group
  - Beamstrahlung losses
  - Machine backgrounds
  - Higgs mass, cross section, & branching ratios
  - Stau detection
  - Low mass SUSY scenario (an example)
  - Polarization
- The improvement in the low energy luminosity performance over the past year appears to have significantly restored physics potential of the ILC design
- We assume traveling focus will be implemented
  - Without it, the main impact would be at the highest energies (~25% loss of luminosity)